

Solid Structure Portable Building
2024 Retail

86 County Road 281

Lineville, AL 36266

Email :

Yourminibarn@gmail.com

Ervin# :

256-252-5310

Office# :

256-252-8392

Price as of :

3/28/24

****Prices subject to change****


Comes standard with 16" on center 2x4 studs / 2' on center 2x6 rafters, 10'10" walls in the front, 9'10" walls in the back, framed ready to finish, house wrap, 3/4" subflooring, 16" on center 2"X6" floor joists, 5 - 3'x2' transom windows, 2 - 3'x4' windows, 2 - 4'x4' windows and 1 - 9 lite door.

Also, comes with 2 framed lofts.

****Wainscoting is not standard****



Size	Overhang	Base price
12'X36'	3'4" front	\$ 15,840.00
12'x40'	3'4" front	\$ 17,601.00
12'x44'	3'4" front	\$ 19,361.00
12'x48'	3'4" front	\$ 21,121.00
14'X36'	1'4" front	\$ 18,481.00
14'x40'	1'4" front	\$ 20,535.00
14'x44'	1'4" front	\$ 22,588.00
14'x48'	1'4" front	\$ 24,642.00

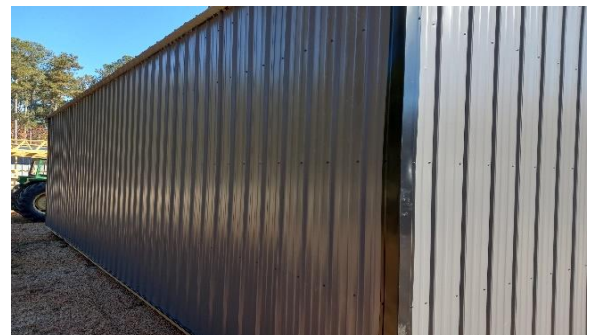

Solid Structure Portable Building
2024 Retail

Price as of : **3/28/24**

****Prices subject to change****

Tiny Home Options

Rough in cabin electrical package Includes : 125 amp breaker box, 15 - 110 outlets, washer / dryer outlets, stove outlet and 3 fan / light ceiling boxes .	\$1,800.00	Package
Additional outlet or switch	\$50.00	Each
Additional exterior outlet (GFI)	\$75.00	Each
3' X 3' double pane window	\$290.00	Each
3' X 4' double pane window	\$305.00	Each
Interior wall framing (16" on center)	\$22.50	Linear foot
Door framing	\$50.00	Each
Wainscoting	\$10.00	Linear foot

Installations :

Shower stall (labor only)	\$400.00	Each
Bathroom vanity (labor only)	\$275.00	Each
Toilet (labor only)	\$200.00	Each
1 1/2" T&G ceiling (material & labor)	\$12.00	Square foot
3/4" T&G wall paneling (material & labor)	\$12.00	Square foot
Flooring (labor only)	\$3.00	Square foot
Washbox (labor only)	\$200.00	Each
Kitchen cabinet (labor only)	\$100.00	Linear foot
Kitchen sink installation (labor only)	\$250.00	Each